



**Evolution TBM  
Hydrotherapy Bathtub  
Installation & Operation Instruction  
Manual**

---

**Home Owner Use & Care Guide**

---

**Read and follow  
*ALL* instructions in this manual.**

---

***Save These Instructions!***

503 Railroad Avenue Glenwood, IA 51534-2001  
(712) 527-1800 FAX 527-4331  
Customer Toll Free 1-800-795-1812



## SAFETY FIRST



### All Trajet Hydrotherapy tubs are equipped with a **SAFETY SUCTION**

**Safety Suction** - This feature breaks the suction of the pump in case anything such as a wash-cloth or long hair would get stuck on the suction cover. Once the object is removed, the system resumes its normal operation.

The proper performance of this safety feature depends upon an open-ended air line behind the wall of the tub. This line is a vent for the system and must remain in place and unobstructed. It also must remain above the water level of the tub.

### **YOU MUST NOT MOVE OR REMOVE THIS AIR LINE.**

Removing or changing the location of this line will affect the performance of this important safety feature and may allow water to drain from the tub onto the floor behind the tub wall.

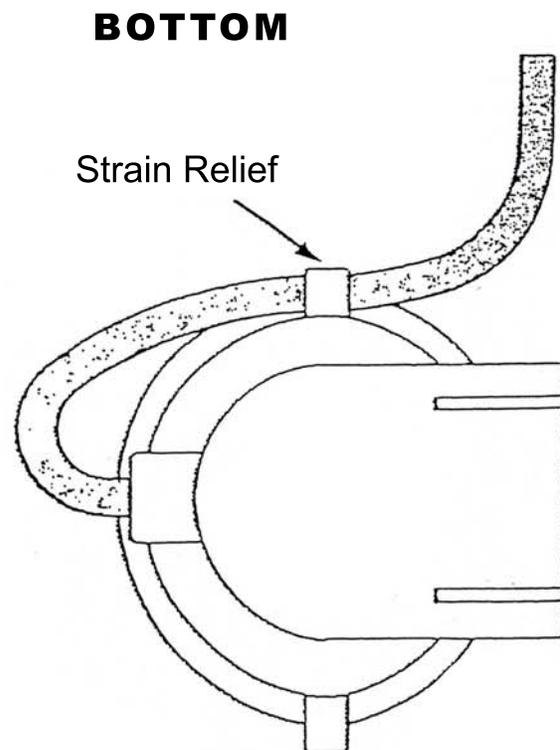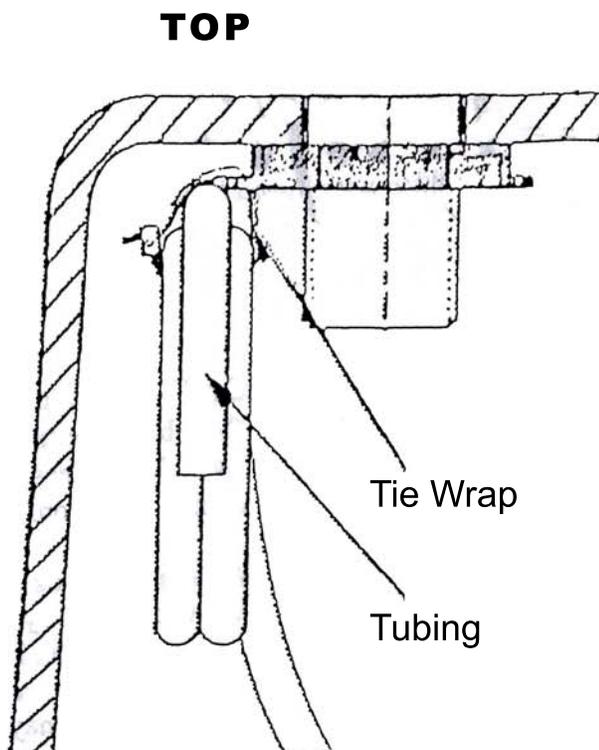

General Information	3
Operational Safety Instructions	4
Electrical Installation and Configuration	5
Framing Instructions and Illustrations	6-7
Installation Clean Up and Final System Test	8
Bathtub Illustrations and Safety Suction	9
System Controls	10
Operating your System and Bathtub Cleaning	11
Cleaning Water Port System	12
Troubleshooting Guide	13-14
Other Information / Scratches and Stains	15
Warranty	16



## Inspection, Testing, & Visual Inspection

Remove the bathtub from the shipping carton. Be careful not to scratch the surface of the bathtub on exposed staples. Remove the staples or fold them into the carton. Retain the carton until satisfactory inspection of the product has been made. Do not lift the bathtub by the plumbing at any time; handle by the shell only.

Inspect the shell and bathtub components. Should inspection reveal any damage or defect in the finish or visible damage to any components, **do not install the bathtub**. Damage or defect to the finish claimed after the bathtub is installed is excluded from the warranty. Trajet's responsibility for shipping damage ceases upon delivery of the products in good order to the carrier.

Refer any claims for damage to the carrier. For definitions of warranty coverage and limitations, refer to the published warranty information packed with the product or in the back of this manual.

Upon receipt, **immediately inspect the tub to make sure the unit has shipped as ordered** and has arrived undamaged. If a problem is discovered, call Trajet immediately. Handling damages are not covered under warranty. Protect the tub during installation to prevent damage. Do not stand or place tools directly on the tub finish. Check pump unions, hand tighten only. **Remember to water test the system and plumbing before enclosing.** Always refer to local building codes.

### ELECTRICAL REQUIREMENTS

Pumps are pre-wired with leads that can be plugged into a grounded GFCI protected dedicated circuit of adequate amperage.



**WARNING:** When using electrical products, basic precautions should always be followed, including the following:

#### 1. **DANGER: RISK OF ELECTRIC SHOCK.**

The unit must be connected to a supply circuit that is protected by the installer and should be tested on a routine basis. To test the GFCI, push the test button. The GFCI should interrupt power. Push the reset button. Power should be restored. If the GFCI fails to operate in this manner, the GFCI is defective. If the GFCI interrupts power to the bathtub without the test button being pushed, a ground current is flowing, indicating the possibility of an electric shock. Do not use this hydrotherapy bathtub. Disconnect the hydrotherapy bathtub and have the problem corrected by a qualified service representative before using.

2. A qualified service technician in accordance with all applicable local and national codes must perform all electrical wiring, service and repair. Failure to do so may pose electrical hazard.

3. Before making any electrical connections, make certain that the electrical power is turned OFF at the circuit breaker, and take measures to ensure that it CANNOT accidentally be turned on again.

4. Install in such a manner as to permit access for servicing.

**An approximate 14"x14" (35cm x 35cm) access door is recommended.**

5. Grounding is required. The unit shall be installed and grounded by a qualified service representative before using.

6. For permanently connected units, a green colored terminal (or a wire connector marked "G", "GR", or "Grounding") is provided within the terminal compartment. To reduce the risk of shock, connect this terminal or connector to the grounding terminal of your electric service or supply panel with a conductor equivalent in size to the circuit conductor supplying this equipment.

7. It is important that the wiring be safely completed. When cutting conduits, be sure to debur the edges and remove any sharp edges, which may cut or damage the wire. Use the proper electrical connectors and bushings for all installations.

8. Building materials and wiring should be routed away from the pump body or other heat producing components of the system.

9. The metal enclosure of all electric components, current collectors and other metal in contact with the tub water shall be bonded together by individual solid copper bonding conductors not smaller than #8AWG (8.4mm).

10. Never drop or insert any object into any opening.

11. Do not operate this unit without the guard over the suction fitting.

12. **SAVE THESE INSTRUCTIONS.**

## Operational Safety Instructions



### **WARNING: RISK OF HYPERTHERMIA AND POSSIBLE DROWNING!**

Do not use a hydrotherapy bathtub equipped with heater immediately following strenuous exercise.



### **WARNING: RISK OF ELECTRICAL SHOCK!**

- Do not permit electrical appliances (such as a hair dryer, lamp, telephone, radio or television) within 60" (1524mm) of this bathtub.
- Do not operate hydrotherapy system unless the bath is filled with water to at least 1-2" above the highest jet.
- Do not immerse the control panel by overfilling the bath.
- When cleaning your bath, do not use abrasive substances which will damage the bath's surface.
- To prevent discoloration of the acrylic finish, do not fill the bath with water in excess of 140°F (60°C).



### **WARNING: PROLONGED IMMERSION IN HOT WATER MAY INDUCE HYPERTHERMIA!**

Hyperthermia occurs when the internal temperature of the body reaches a level several degrees above the normal body temperature of 98.6°F (37°C). The symptoms of hyperthermia include:

- an increase in the internal temperature of the body,
- dizziness,
- lethargy,
- drowsiness
- fainting.

The effects of hyperthermia include:

- A. Failure to perceive heat.
- B. Failure to recognize the need to exit the bath.
- C. Unawareness of impending hazard.
- D. Fetal damage in pregnant women.
- E. Physical inability to exit the bath.
- F. Unconsciousness resulting in danger of drowning.



**WARNING: RISK OF FETAL INJURY!** Pregnant or possibly pregnant women should consult a physician before using a hydrotherapy bathtub equipped with a heater.



**WARNING:** To reduce the risks of injury, do not allow children to use this unit without the supervision of an adult at all times.



**WARNING:** The use of alcohol, drugs or medication can greatly increase the risk of fatal hyperthermia. People using medications or having an adverse medical history should consult a physician before using a hydrotherapy bathtub equipped with a heater.



**WARNING:** Use this unit only for its intended use as described in this manual. Do not use attachments not recommended by the manufacturers.



**WARNING:** To avoid injury, exercise caution when entering or exiting the bathtub.

**WARNING:** Do not use hydrotherapy bathtub unless all suction guards are installed to prevent body and hair entrapment. Never operate the hydrotherapy bath if the suction cover is broken, damaged or missing. Failure to provide suction cover can cause bodily injury, dismemberment, and drowning from hair entrapment.

**WARNING:** Water temperature in excess of 104°F (40°C) may be injurious to your health. Check and adjust water temperature before use.

**CAUTION:** Test the ground fault circuit interrupter protecting this appliance periodically in accordance with manufacturer's instructions.

**IMPORTANT:** Read the complete instructions provided in this manual before beginning installation. The Company has obtained applicable code (standards) listings generally available on a national basis for products of this type. It is the responsibility of the installer/owner to determine specific local code compliance prior to installation of the product. The Company makes no representation or warranty regarding, and will not be responsible for any code compliance. Product specifications are subject to change without notice.

## Electrical Installation



**Risk of electric shock.** Connect only to a circuit protected by a GFCI.



When using electrical products, basic precautions should always be followed:

- Always follow local building and electrical codes.
- Grounding is required. The unit should be installed and grounded by a qualified electrician.



Two separate GFCI protected circuits are required.



A separate, 120VAC, 20 Amp GFCI circuit is required for the pump/motor.



A separate, 120VAC, 15 Amp GFCI circuit is required for the blower.



**WARNING: Metal housing pump requirements:**

1hp. = 120 volts, 7.5 amps; 1-1/4hp = 120 volts, 5.5 to 5.9amps; 1-1/2hp. =120 volts, 16.5 amps.



The metal enclosure of all electrical components, current collectors and other metal in contact with tub water shall be bonded together with individual solid copper bonding conductors not smaller than #8AWG (8.4mm). A grounding clamp is provided on the pump housing.



**WARNING:** Each pump is equipped with a thermal limiter that shuts off the entire unit, in the event the pump becomes overheated.



**WARNING:** The GFCI should be provided by the installer and should be tested on a routine basis.

### CONFIGURATION SHEET:


Following instructions pertaining to your tub.

Sufficient clearance must be provided for access to service connections, pump and electrical hook-ups. **A 14" x 14" access door is recommended.**

#### Configuration 1

##### One Pump Systems

Pump Equipped with Cord & Plug




Provide a power supply circuit, GFCI protected and appropriately rated (max 20A) for the pump.

Pump rated 120V, 13.5 Amp

#### Configuration 3

##### Pump & Light Systems

Pump & Light Equipped with Cord & Plug

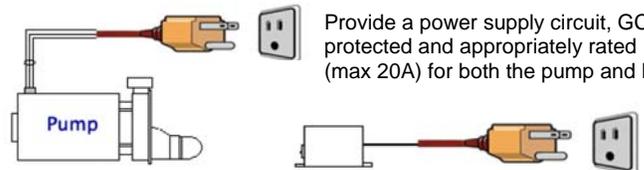

Provide a power supply circuit, GFCI protected and appropriately rated (max 20A) for both the pump and light.


Light Control Box

Pump rated 120V, 13.5 Amp  
Light Box rated 120V, .5Amp


#### Configuration 2

##### Pump & Blower Systems

Pump & Blower Equipped with Cord & Plug



Provide a power supply circuit, GFCI protected and appropriately rated (max 20A) for the pump.




Provide a power supply circuit, GFCI protected and appropriately rated (max 20A) for the blower.

Pump rated 120V, 13.5 Amp  
Blower rated 120V, 700 watts, 8 Amp


#### Configuration 4

##### Pump, Blower & Light Systems

Pump, Blower & Light Equipped with Cord & Plug



Provide a power supply circuit, GFCI protected and appropriately rated (max 20A) for the pump, light and blower.



Light Control Box

Pump rated 120V, 13.5 Amp  
Light Box rated 120V, .5Amp  
Blower rated 120V, 700 watts, 8 Amp

### PLUMBING REQUIREMENTS

All hydrotherapy systems are filled in the same manner as a standard bathtub with an over-the-tub spout and 1 ½" drain. Certain units may require a longer spout. Check the specifications to locate the position of the floor cut out needed to hook up the drain on your specific model. The water heater capacity should be equal to the water capacity of the tub.


### FRAMING INSTRUCTIONS

**Framing is not recommended prior to receiving your whirlpool** due to possible measurement variances. After receiving the unit, measure the height of the unit from the floor to the tub lip. Build a support frame under all four lips slightly higher than the height of the tub itself. Add an additional 1/2" of height to allow the mortar and caulk to bridge any gaps between the floor and tub base or between the frame and tub lip (diagrams below). Remember that the support frame should be level in all directions to insure that the tub deck after installation is level. If the tub is not installed with a level deck, the tub bowl and piping may not drain properly. If your tub is provided with a skirt, there is no need to build a support frame on the skirt side. The skirt will provide support to the tub lip. However, the other sides do have to be supported.

**Access Panel Required:** Sufficient clearance must be provided for access to service connections, pump and electrical hook-ups. **A 14" x 14" access door is recommended.**


When fittings (spout, handles, valves, etc.) are to be mounted on the unit, be certain that the hot and cold water copper supply lines are located where there is ample room for mounting **before** setting the unit in place.

### SETTING THE TUB IN PLACE

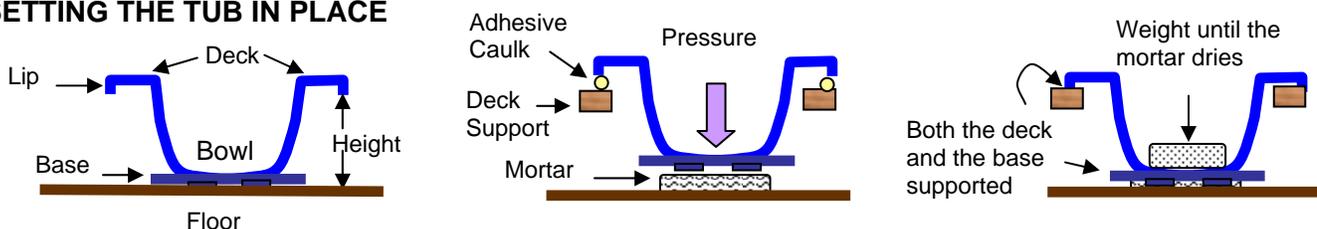

Build a level support frame as recommended. Put a bridging agent both on the floor and the deck support. Set the tub in place and apply pressure until the tub deck is firmly against the support frame. Leave some weight (approximately 50 lbs) in the tub until the mortar and adhesive caulk dry. This weight will prevent the tub from rising back up. If the tub bowl is not supported, the weight of the water and an occupant will eventually cause the tub to shift or crack. If the tub deck is not supported properly, it will flex causing the grout line to fail.

### Incorrect Installations

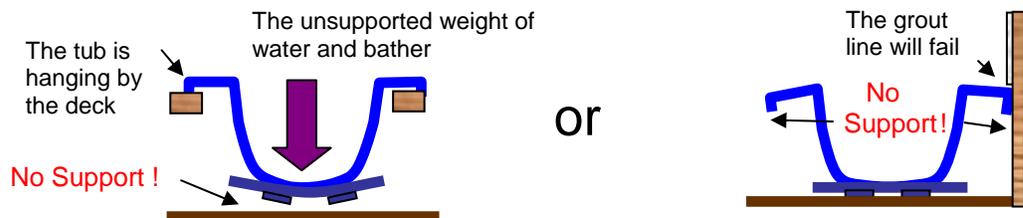


- Do **NOT** lift the tub by any portion of the plumbing or pump.
  - Do **NOT** stand in the tub during construction. To help protect your tub, place corrugated or other padded material on floor of whirlpool.
  - Do **NOT** put insulation around, or block airflow to pump. Pump will over heat and shut down.
  - Damage by incorrect installation is **NOT** covered under warranty.
  - Do **NOT** make any alterations, additions, or deletions to the hydrotherapy system, pump, or bathtub.
- Warning:** The pump and piping are factory assembled. Relocation of pump or other modifications could adversely affect the performance and safe operation of the unit, and will **void** the warranty.


## Illustrations

### Platform Installation


Frame opening should be 2" less than the length and width of the tub to provide deck support.

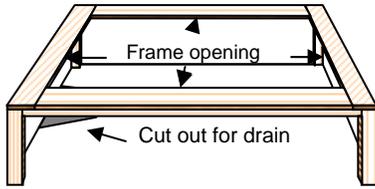


Build frame 1/2" higher than tub lip.

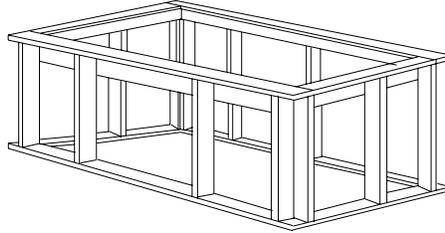

Slide the tub in place as instructed above with both the deck and bowl supported. A layer of mortar is placed under base of tub.

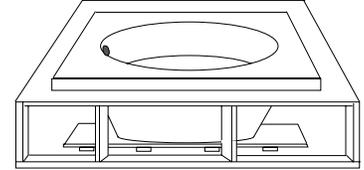


**To insure proper drainage**, use a 4 ft. level to level the top of bathtub in both directions, do this before mortar is dry.

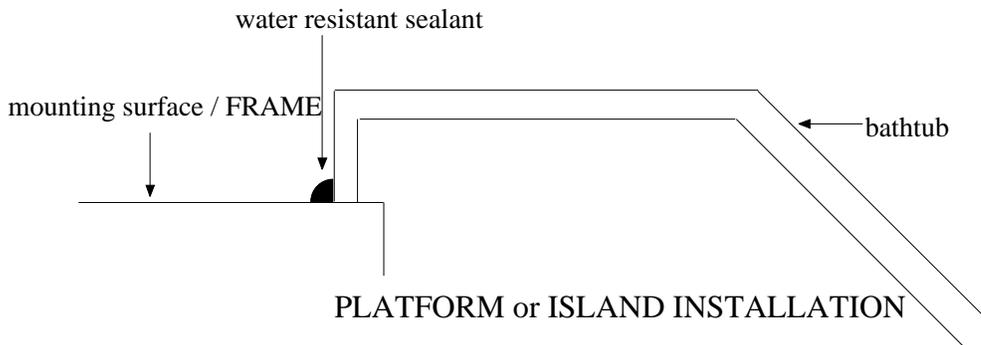


### Alcove Installation

Support frame should be level and 1/2 inch higher than the tub lip.

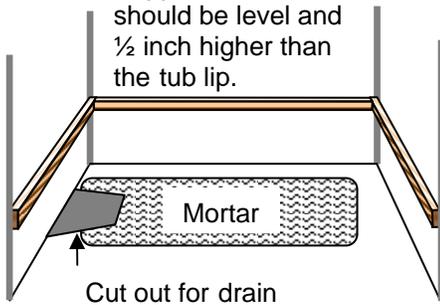


**Remember:**  
Leave an access panel opening for service access to the pump and electrical connections.  
**A 14" x 14" access door is recommended.**


Install the tub per the instructions above and tile down to the tub deck. Finish the apron as desired.

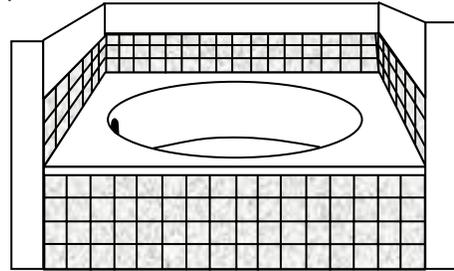

### Optional Tile Flange

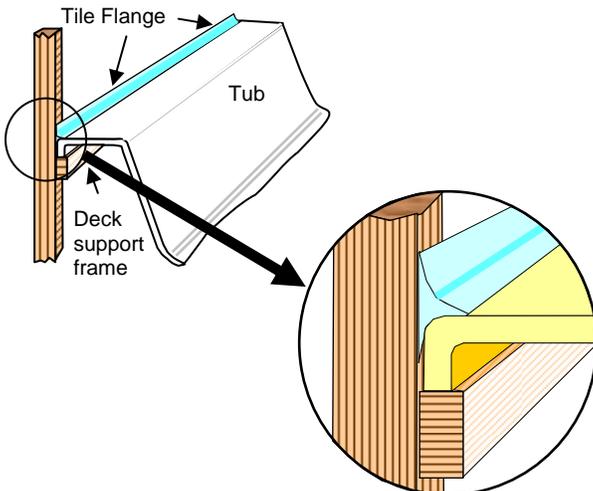

### Optional Front Apron with Access Door

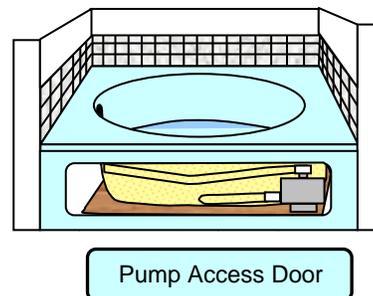

### Clean-Up:



1. Remove all construction residue and foreign materials. Wipe unit clean with a damp rag, otherwise, staining may occur.
  2. Plaster drops may be removed by applying pressure with the edge of a piece of wood or plastic putty knife. **DO NOT** use metal scraper. For spots left by plaster or grout: rub lightly with a liquid detergent on a damp cloth or sponge.
  3. **DO NOT** use abrasive cleaners, scouring powders, steel wool, wire brushes, or anything else that may harm or dull the surface.
  4. Paint, tar or stubborn stains may be removed with non-acetone fingernail polish remover, turpentine or rubbing alcohol. To avoid discoloration, cleaners containing petroleum distillates must not remain on surface. **NEVER** use lacquer thinner or chlorinated solvents.
  5. Dulled areas can be restored to a high gloss with white or cream colored automotive rubbing compound, followed by application of carnauba wax or white or cream automotive paste wax and buffing
  6. Remove minor scratches with 600 grit wet/dry sandpaper, followed by use of automotive rubbing compound and paste wax, as above.
  7. Major gouges require professional repair.
- 

### System Test:

1. Dirt left in tub may cause staining. Remove all debris before filling. Fill clean tub with water to overflow fitting.
2. To test the Ground Fault Circuit Interrupter (GCFI), push the test button. The GCFI should interrupt power. Push the reset button. Power should be restored. If the GCFI fails to operate in this manner, there is a ground current flowing, indicating the possibility of an electric shock. Do not use this unit. Disconnect the unit and have the problem corrected by a licensed electrician before using.
3. Run the hydrotherapy system through its entire time cycle (20 Minutes) using every possible function on the control panel according to the Operation and Maintenance Guide.
4. If any electrical malfunctions occur, consult electrician. Malfunctions of the pump, controls or the circulation system should be reported back to Trajet Products, Inc.
5. Through access panel, check for leaks in whirlpool plumbing system. Make sure unions on pump are hand tight.  
If leakage is occurring at any other point, notify Trajet Products, Inc immediately.
6. Empty whirlpool completely by allowing self-draining components to empty. Wipe dry.


# EVOLUTION TBM

Tub model and system configuration may vary.

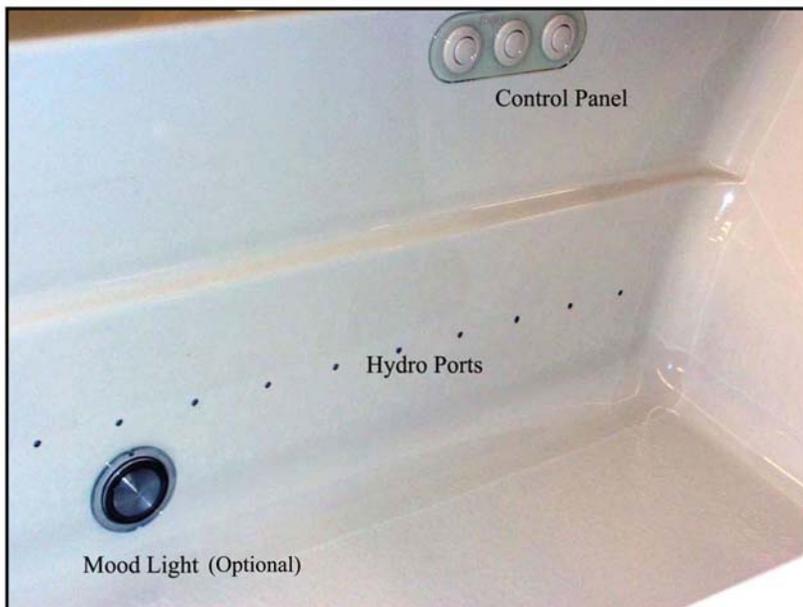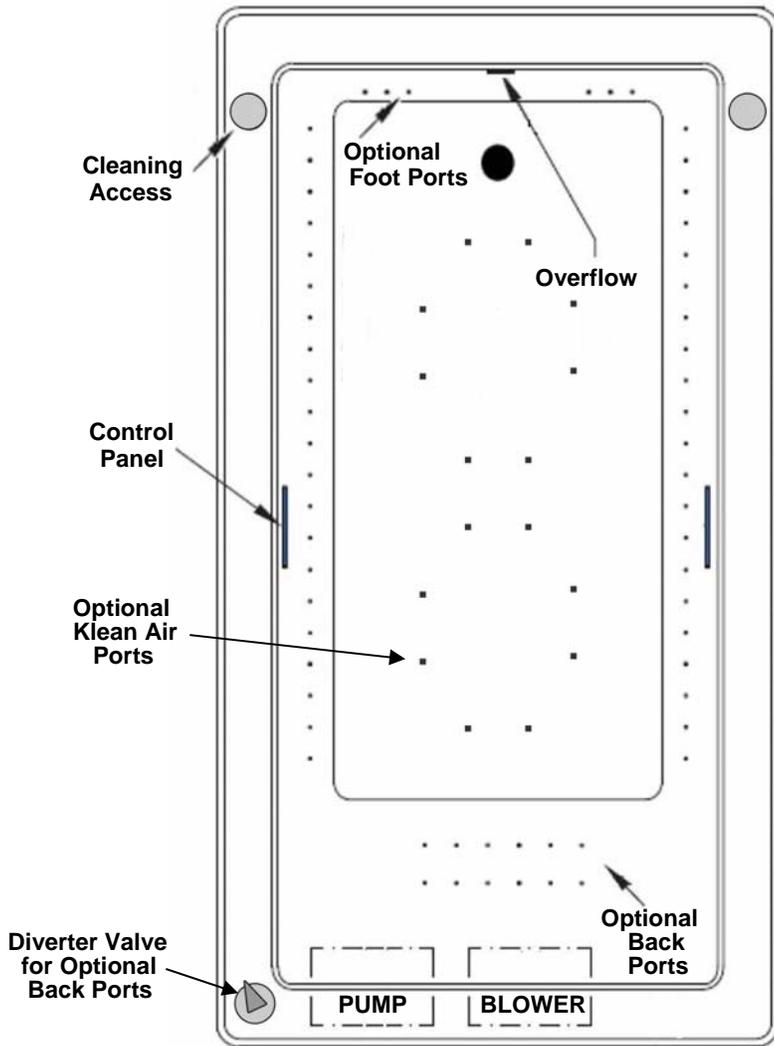

All Trajet Hydrotherapy tubs are equipped with a **SAFETY SUCTION**

Suction-Water Intake




This feature breaks the suction of the pump in case anything such as a wash-cloth or long hair would get stuck on the suction cover. Once the object is removed; the system resumes its normal operation.

The proper performance of this safety feature depends upon an open-ended air line behind the wall of the tub. This line is a vent for the system and must remain in place and un-obstructed. It also must remain above the water level of the tub.


**YOU MUST NOT MOVE or REMOVE THIS AIR LINE.**

Removing or changing the location of this line will affect the performance of this important safety feature and may allow water to drain from the tub onto the floor behind the tub wall.

TOP



BOTTOM



## Control Configurations

### EVOLUTION 1

**Pump On/Off Button:** Push once to turn on.  
Push again to turn off.

**Veraflow Control:** Variable Speed Air Injection\*  
Low, Med, High

\*Turn dial to increase or decrease speed.



Pump On/Off

Veraflow

### EVOLUTION 2

**Pump On/Off Button:** Push once to turn on.  
Push again to turn off.

**Veraflow Control:** Variable Speed Air Injection\*  
Low, Med, High

\*Turn dial left or right to increase or decrease speed.

**Diverter Valve:** Turn dial left or right to turn the  
water ports on the back on and off.



Pump On/Off

Veraflow



Diverter Valve

### EVOLUTION 3

**Pump On/Off Button:** Push once to turn on.  
Push again to turn off.

**Veraflow Control:** Variable Speed Air Injection\*  
Low, Med, High

\*Turn dial left or right to increase or decrease speed.

**Blower On/Off Button:** Variable Speed Air Blower  
Low, Med, High, Pulse, Purge\*\*

Push button to cycle through variable speeds and turn off.

\*\* Twenty minutes after use, the system initiates a one-minute drying cycle that dries out the jet valves ensuring a longer life and perfect hygiene.

**Diverter Valve:** Turn dial left or right to turn the  
water ports on the back on and off.



Pump On/Off

Veraflow

Blower On/Off



Diverter Valve

### Operating your System:



- Before using your tub for the first time, clean the tub and **wipe out any debris**.



- Fill the tub **at least two inches** above the highest jet before turning on the pump.

Exposed jets will cause excessive splashing.

**Never run the unit dry** - this can damage the pump.



- Do not leave **children physically challenged persons unattended** in or around an operating system.



- Consult your doctor before you use the massage bath for physical therapy of an injury or disorder.

Do not take a massage bath without your doctor's consent if you are ill or pregnant, or if you suffer from high blood pressure, heart disease, or other health problems. Never take a massage bath while under the influence of medication, drugs or alcohol.



- Never have any **electrical device** within reach.



- Never put your **head under water** while operating the Hydrotherapy System.

Hair can be caught in suction inlet and cause injury.

- **HIGH FOAMING AGENTS** (bubble baths) **SHOULD NOT BE USED when the pump is operating.**

Take your Hydrotherapy bath first, then use soap like a standard tub. Using oils can cause build-up in the system and may require extra cleaning.

### Care and Maintenance



**Warning:** Never use abrasive household cleaners on any Trajet product.

1. Under no circumstances use wire brushes, metal sponges, knives, steel wool or scouring pads on any part of the tub.
2. Under no circumstances use powerful solvents such as paint thinner, benzene or abrasive cleanser on any part of the tub.
3. Do not use ammonia or chlorine-based cleansing agents on any plated surface, as they will deplete the surface and void the warranty on the plated finish.

### Cleaning your Bathtub:



**For normal cleaning**, use a soft sponge with warm water and cleaner. Make sure the cleaner does not contain abrasives, ammonia or any harsh additives. Many non-abrasive cleaning agents designed for plastics and fiberglass are now on the market.

One way to keep your Hydrotherapy System looking like new is with a little preventative maintenance. After using your tub, take a moment and wipe it out with a towel. This habit prevents usual film build-up.

Products such as **Gel-Gloss can be applied to the unit to increase and maintain the shine.**

You can protect and restore the gloss to a dulled acrylic surface by applying Meguiar's #10 Mirror Glaze, a product specifically designed for use on acrylic finishes. If Meguiar's is not available, use a fine grade automotive rubbing compound followed by an application of automotive paste wax.

### Easy Access Cleaning Ports

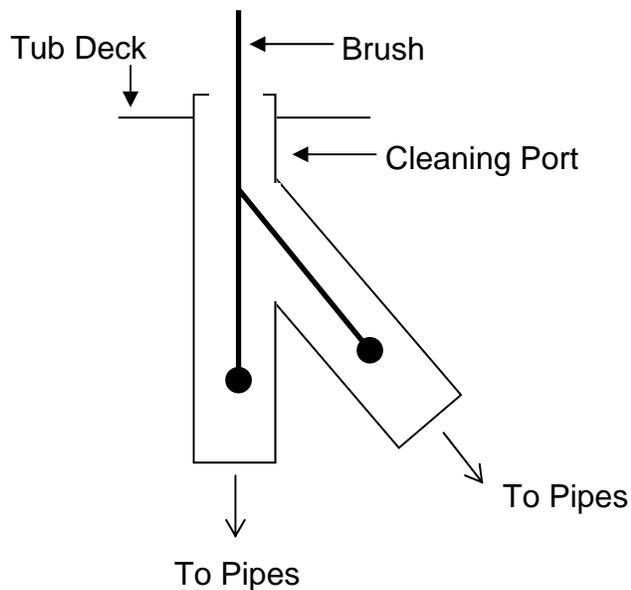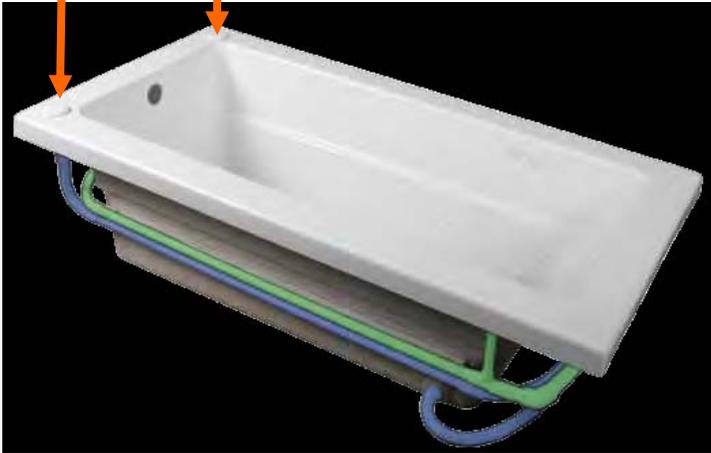

### Water Ports



### STEP BY STEP INSTRUCTION

- 1) Remove Cleaning Port Caps from top of the tub deck.
- 2) Mix 1 teaspoon of Cascade Dishwashing Detergent to 1 gallon of water
- 3) Using a funnel, pour solution down Cleaning Ports. Wait 10 minutes.

- 4) Then take brush and put it down both sides of the Cleaning Ports.

See Illustration

*If you do not have a TBM brush replace Cleaning Port Cap (hand tighten) and proceed to Step 7.*



- 5) Using a back and forth motion scrub in side of water ports.
- 6) Remove brush and replace the Cleaning Port Caps. Tighten by hand.
- 7) Fill tub above water ports with water. Turn pump or blower on and run system for 15 minutes.
- 8) Turn off pump or blower. Drain tub. Refill tub above water ports. Turn pump or blower on and run system for an additional 15 minutes.
- 9) Turn off pump or blower. Drain tub. Using dry towel wipe out entire bath tub.

**We suggest cleaning approximately every 3-4 months for best results.**



## TROUBLE SHOOTING – HYDROTHERAPY SYSTEM

Problem	Probable Cause	Solution
<b>Black particles are coming out of the ports</b>	System NOT flushed on a regular basis	If this should occur, you may need to clean the system several times, doubling the cleaning agent amounts.
<b>Pump/motor does not start</b>	No power to pump/motor Pump/motor not plugged in Pump/motor faulty	Reset GFCI. Test status of outlet by plugging in a working electrical appliance.  Insert plug securely into outlet Ensure the control panel is connected to control box. Replace Pump
<b>Pump/motor operates but no jets are functioning</b>	Jets are closed Suction cover/strainer may be clogged	Open jets by rotating counter-clockwise. With the motor turned OFF, remove the suction cover/strainer and remove any debris. Replace the suction cover before operating.
<b>Pump/Jet pressure surges (slows down then speeds up again)</b>	Pump cavitations	Change direction of jets so they do not point at the suction.
<b>Pump/motor operates but air is not injected into the water</b>	Check Valve may be blocked or plugged	Contact Trajet Service Support 1.800.795.1812
<b>Pump/motor shuts off by itself</b>	Motor thermal protection has deactivated pump/motor due to overheating (supply voltage low) GFCI tripped Inadequate supply wiring	Let motor cool; thermal protection will reset. Check for proper ventilation (check supply voltage)  Reset GFCI. If it continues to trip, do not use this unit.  Disconnect the unit.
<b>Water leakage from pump unions</b>	Over tightened, O-ring may be pinched or improperly seated, under tightened	Loosen unions, check and reseal O-ring. If O-ring has been pinched out of shape, replace (refer to number below). When tightening union nuts, hand tighten only.
<b>Chromatherapy lights do not operate</b>	Connector has come loose	Contact Trajet Service Support 1.800.795.1812
<b>Any movement of the tub</b>		Check for proper installation by referring to installation instructions provided by Trajet
<b>Scratches or cracks in finish</b>	Dropped a blunt object	Call a bathtub refinishing company or see “Other Information” section below.

### NOTES:



Disconnect the unit and have the problem corrected by a licensed electrician before using.



If the unit is within the warranty period, contact Trajet Service Support at 1-800-795-1812 with your bath's serial number before work is started. The serial number is located on Serial Number Plate just below the waste and overflow.

## TROUBLE SHOOTING – AIR MASSAGE SYSTEM

F.A.Q.	Probable solutions(s)
Can I insulate around the blower?	<p>A. Never insulate blower, but it is recommended to insulate the air hose to prevent any loss of heat;</p> <p>B. Air surrounding blower must be at room temperature where the bathtub is installed. The blower should not heat the air coming from a basement or a garage.</p>
The air blower starts on its own.	<p>This may be normal as most air blowers are equipped with an automatic purge cycle that will start 20 minutes after the use of the system, however:</p> <p>A. In a case where there was a power outage the purge cycle might turn on;</p> <p>B. If the system is equipped with a water detector, the purge cycle will start each time that the bathtub has received water i.e. after a shower, after cleaning;</p> <p>C. If this happens often and the system was not previously in use, please contact your distributor as the touch pad may be defective and have to be replaced.</p>
The purge cycle does not come on.	<p>First verify with your distributor that your blower is equipped with this option. If so:</p> <p>A. Verify that the power to the system is not supplied through a wall timer or a safety switch. If the timer is shut off before the purge cycle, it will prohibit the blower from turning on;</p> <p>B. Verify that no water is left in the bathtub since the unit might be equipped with a water sensor to activate the purge cycle.</p>
I can hear the blower working but no air comes through the jets.	<p>Verify that the 1 ¼" air hose connected between the blower and the manifold has not fallen off. If so, simply reinsert and place a screw through the collar, the hose and the blower nozzle to keep firmly in place.</p>
I can hear the blower working but not all jets are working.	<p>This is caused when the jets are clogged with either installation debris or calcium accumulation. To solve this, simply do the following:</p> <ol style="list-style-type: none"> <li>1. Fill the tub with enough hot water to cover all the bottom jets; Turn on the system and let function for one full minute; While the system is in function, locate exactly which jets are not working and gently tap on the top of the jet covers with the plastic end of a screwdriver or a small rubber hammer.</li> <li>2. If jets still don't work try the following. Fill tub with a few inches of warm water. <ul style="list-style-type: none"> <li>- Add 1 cup of CLR Pro. Let still for a couple hours without turning on jets.</li> <li>- Drain and then rinse the tub several times with cold water to ensure CLR is gone.</li> </ul> </li> </ol>
My blower works but stops after 10-15 minutes.	<p>The blower is equipped with a thermo protector. If the blower should overheat for any reason, it will automatically shut down.</p> <p>A. Allow system to cool for approximately 1 to 1 ½ hours;</p> <p>B. Check that the blower has not been insulated and that surrounding air circulation is sufficient.</p>
The air coming out of the jets is cold.	<p>To verify if the air heater is functioning properly simply run the blower for approximately 5 minutes and touch the air hose that is connected to the blower. The hose should feel very warm:</p> <p>A. If not, please contact your distributor who will inform you of the procedures to have the blower changed;</p> <p>B. If so, the blower is not defective and the sensation of coolness may sometimes occur. This is due to a theory that simply states that air injected onto wet skin always feels cool. Unfortunately, some people are more skin sensitive to this theory than others. As with a hand blower in a public washroom, the air seems cold until your hands are dry. The only solution is to slightly change positions in the tub and the sensation will diminish with time.</p>
My GFCI keeps tripping.	<p>In the case where the bathtub is equipped with a whirlpool pump and an air massage blower, verify that each is connected to an independent GFCI breaker.</p> <p>Sometimes the GFCI breaker is too sensitive. If the GFCI trips, disconnect the blower and connect a light or a hair dryer. If the GFCI trips again, there is an electrical short somewhere along the line. Have this checked by your electrician. If the problem persists again, the GFCI breaker will have to be changed.</p>
<p>If the unit is within the warranty period, contact Trajet Service Support at 1-800-795-1812 with your bath's serial number before work is started. The serial number is located on Serial Number Plate just below the waste and overflow.</p>	

### Scratches, Burns, Stains and Dulling

Of all the day to day wear and tear around a home, a scratched bath tub is one of the more demoralizing things. Our beautiful glossy acrylic bath tub that once looked perfect now displays a blemish, an imperfection, which makes us wonder if we have to go shopping for a replacement. But before you start checking your bank balance to see what you can afford you should know that there are alternatives.

One of the great advantages of an acrylic bath tub is that it has a solid surface. In other words, the color that you see on the outside goes all the way through the surface. It hasn't been painted or sprayed on, but has been applied from a solid color base.

As a result, minor repairs to an acrylic bathtub are relatively straightforward.

### Cleaning an Acrylic Bathtub

Cleaning an acrylic bathtub of stains and deposits is simple. The tub surface is non-porous and, as a result, normal dirt washes off with clean water. For more stubborn stains try ordinary liquid dish washing soap or stronger ammonia based cleaners.

You should never use paint removers or thinners as these will damage the acrylic, and, most likely, make void the bath tub's warranty.

### Scratches and Dulling

For very fine scratches or dulling, use a liquid polisher or metal polish. These polishes are relatively gentle but slightly abrasive. Rub the area around the scratch in a circular motion, with a little polish on a soft clean cloth, and watch the scratch disappear.

If the scratch is a little deeper, or if the surface is burnt, you may need to use first a piece of fine sandpaper (1500 grit). When using sandpaper, apply a little water first to avoid scratching the area further. Then you should use a liquid polisher as previously described. You should repeat the process until the scratch has completely disappeared. Then buff the surface with a soft dry clean cloth.



## **Five Year Limited Warranty**

Trajjet warrants to the consumer owner, that if a Trajet bathtub should stain, fade, crack, rupture or delaminate within a period of five (5) years (under normal usage) from the original date of purchase, Trajet will at its option, repair or replace any such defect or supply a new whirlpool F.O.B. Trajet, at a minimal cost to owner.

If the particular model is no longer in stock, Trajet reserves the right to replace the defective unit with a comparable unit. If Trajet determines that a replacement unit is required, consumer owner is required to return said defective unit to Trajet with a valid Return Goods Authorization number.

Product is to be packaged in a 600 psi cardboard box or wooden crate, and shipped freight prepaid. Trajet shall not be responsible for cost of removal or replacement whatsoever of the product. This warranty does not cover damage or failures caused by Acts of God, misuse or abuse, accidents, negligence, fire or improper installation.

This warranty also has specific limitations. Excluded from warranty are certain damages including but not limited to: damage by carrier, damage occurring during or after installation, damage resulting from installation, damage from the use of chemicals, bath oil additives, or improper cleaning agents, and damage from product modifications or alterations, careless handling, or unreasonable use such as use for non-bathing purposes or failure to provide regular or necessary maintenance. In no way shall the liability to Trajet exceed the purchase price of the unit.

Trajjet warrants the product plumbing, motor and pump for a period of one (1) year from the date of purchase against manufacturer defect. Trajet shall not be responsible for any labor charges and consequential or incidental damages, including but not limited to: any damages for loss of use of whirlpool, tub or shower or injury to any person or property.

Trajjet shall not be responsible for any costs associated with gaining access to defective units. Any claims, therefore, are hereby specifically disclaimed and excluded. Some states do not allow the exclusion or limitation of consequential damages, so the above limitation or exclusion may not apply to you.

This warranty gives you specific legal rights and you may also have other rights, which vary from State to State. Proof of purchase must be presented with any claim. This warranty does not apply to units used for commercial property.